




DewBuster™ Ring Heater Temperature Sensor

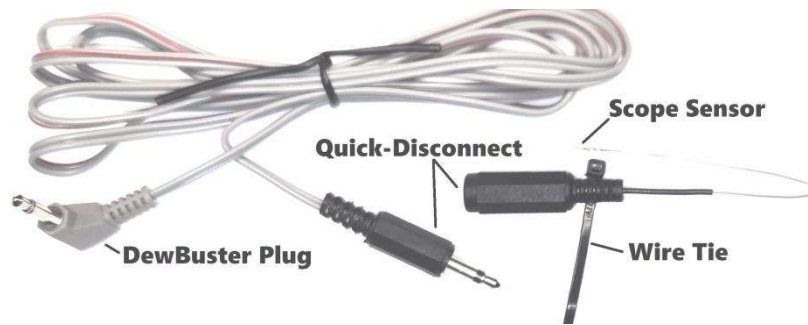

Installation:

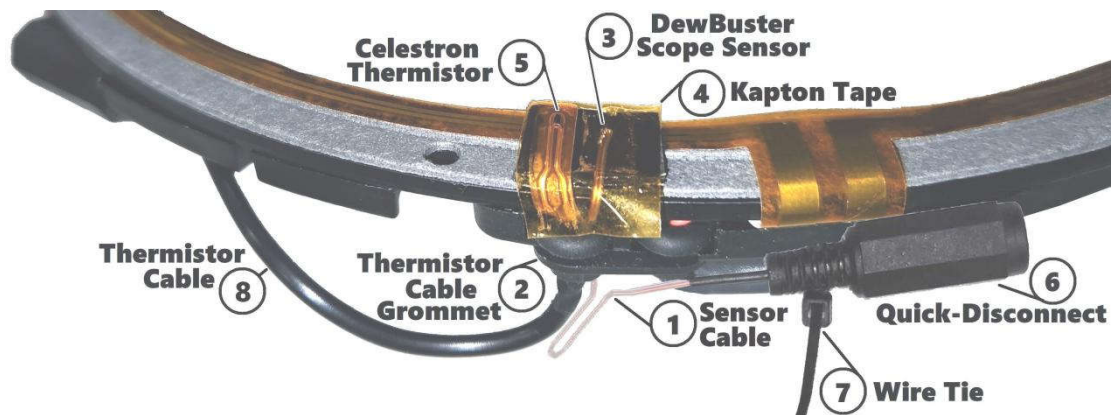

- Insert Sensor Cable (1) through Thermistor Cable Grommet (2) then slip Scope Sensor (3) underneath orange Kapton Tape (4) so it is about 1/8" from Celestron Thermistor (5).

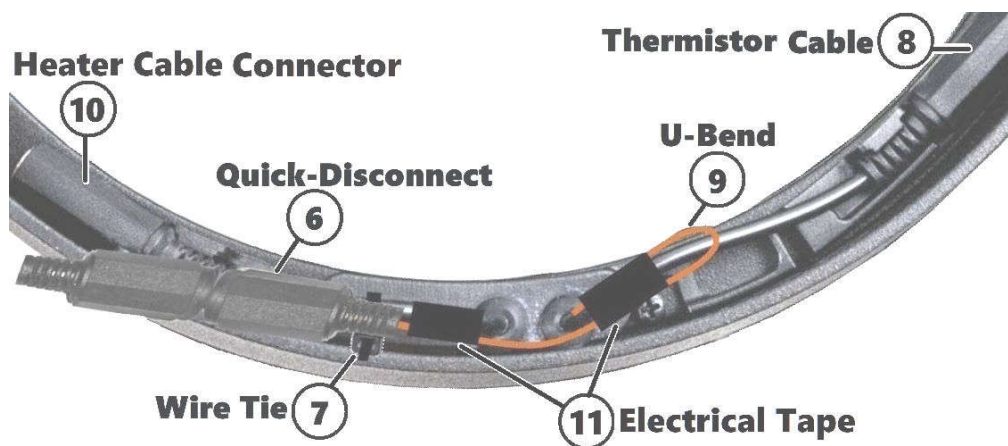

- Position Quick-Disconnect (6) behind Heater Cable Connector (10) and secure Wire-Tie (7) around Heater Cable. Pull Wire-Tie (7) hand-tight then cut excess flush with head of Wire-Tie (7).
- Use Electrical Tape (not included) to secure Sensor Cable to Heater Cable just behind Wire-Tie.
- Form excess Sensor Cable into U-Bend (9) and tape to Celestron Thermistor Cable with electrical tape. This will prevent Scope Sensor from accidentally being pulled out of place.